

# Fact Sheet

## RLS

*Benefit from an efficient product flow with our rollbox loading system. The double fork system can handle up to 25 rollbox loadings per hour. Rollbox protection and optional wrapper ensure maximum product safety. The upstream and downstream storage space guarantees optimal utilization of the system. Short changeover times and ergonomic operation are further advantages of the RLS.*




More information  
High performance  
with a wide range of  
solutions and options.

Specifications	Facts	Details
Storage space	for 3 empty rollboxes	
Storage space	for 3 loaded rollboxes	
Loading station	for 1 rollbox	Dimensions: See dimensional drawing
Rollbox	Max. stacking height: 1,900 mm Max. loading weight: 400 kg	
Product lift	Loading area: 800 mm x 600 mm Height: min. 4 m / max. 7 m	
Loading platform	Ergonomical work station with operator protection	See dimensional drawing
Control system	PLC	Siemens S7
Visualization	HMI	Touch panel
Safety enclosure	System protected by a safety fence	
CE conformity	Machine guidelines	
Control cabinet	painted	

Options	Facts	Details
Wrapping	Load secured by means of stretch film	
Labeling	Printer Applicator Labels	Piston applicator DIN A5
Customer training	Service	
Interface	Transfer of product data	

## Infographic

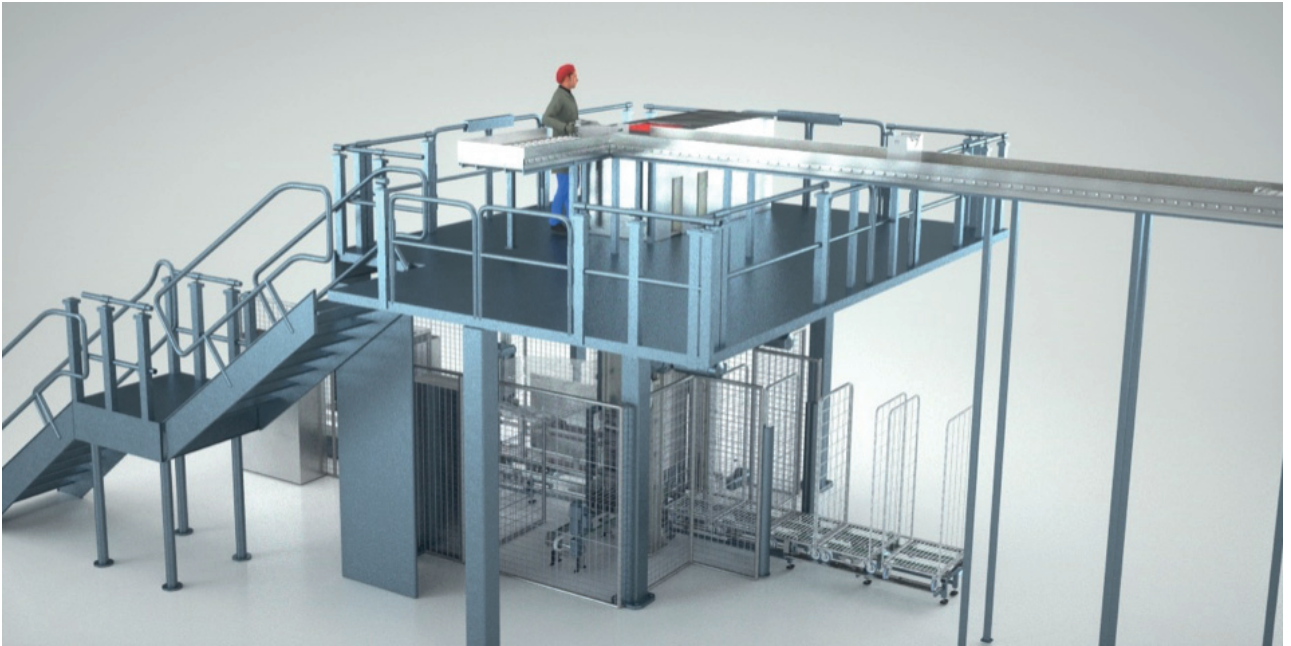

## Symbols

## Dimensions

